



PROFESSIONAL GRADE FUEL TRANSFER PUMPS

Industry-Leading

4 YEAR
PUMP
WARRANTY

18 ft. hoses

*tank adapter
included**

*vacuum
breaker
ready**

** AC pumps only*



PRODUCT CATALOG

GPRO® products have been ENGINEERED TO DELIVER for the demanding conditions of professional use. GPRO fuel transfer pumps are backed by an industry-leading 4-year pump warranty. Manufactured in the U.S.A. by Great Plains Industries, Inc., GPRO products are available through a global network of authorized distributors. **To find out more visit GoGPRO.com.**



TABLE OF CONTENTS

GPRO® PRODUCT LINE

12 VOLT FUEL TRANSFER PUMPS

PRO20-012	4
PRO25-012	5

115 VOLT FUEL TRANSFER PUMPS

PRO20-115	6
PRO20-115RD	9

115/230 VOLT FUEL TRANSFER PUMPS

PRO35-115	7
PRO35-115RD	9

PUMP & METER COMBOS

PRO20-115 & QM Fuel Meter	8
PRO35-115 & QM Fuel Meter	8
QM240 & QM150 Fuel Meters	9
QM240-RD Remote Dispenser	9

ACCESSORIES.....

GPI® HAND PUMPS

HP-100, DP-20, & RP-10	11
---	----



Model Number Extensions and Abbreviations

AD	Automatic Diesel Nozzle included	L8N	Litre, 1 inch, NPT threads	RD	Remote Dispenser
AL	Automatic Leaded Nozzle included	MD	Manual Diesel Nozzle included	UL	The product is UL Listed
G8N	Gallon, 1 inch, NPT threads	P0	Pump Only – Hose & nozzle not included	XTS	Extreme Temperature Series

ENGINEERED TO DELIVER

THE GPRO® PRODUCT LINE INCLUDES:



20 GPM
12 VOLT

PRO20-012

Manual nozzle model shown. Automatic and pump only also available.



25 GPM
12 VOLT

PRO25-012

Manual nozzle model shown. Automatic, pump only, and XTS also available.



20 GPM
115 VOLT

PRO20-115

Manual nozzle model shown. Automatic, pump only, XTS, and meter combo also available.



35 GPM
115/230 VOLT

PRO35-115


Manual nozzle model shown. Automatic, pump only, XTS, and meter combo also available.

HEAVY DUTY FOR THE TOUGH REFUELING JOBS
INDUSTRY LEADING 4 YEAR WARRANTY

PRO20-012

Get more done in less time with the powerful PRO20-012

- Standard model is ready for extreme temperatures, tested to -40°
- 40 amp circuit breaker motor protection
- Field replaceable switch and vanes
- Factory-installed power cord

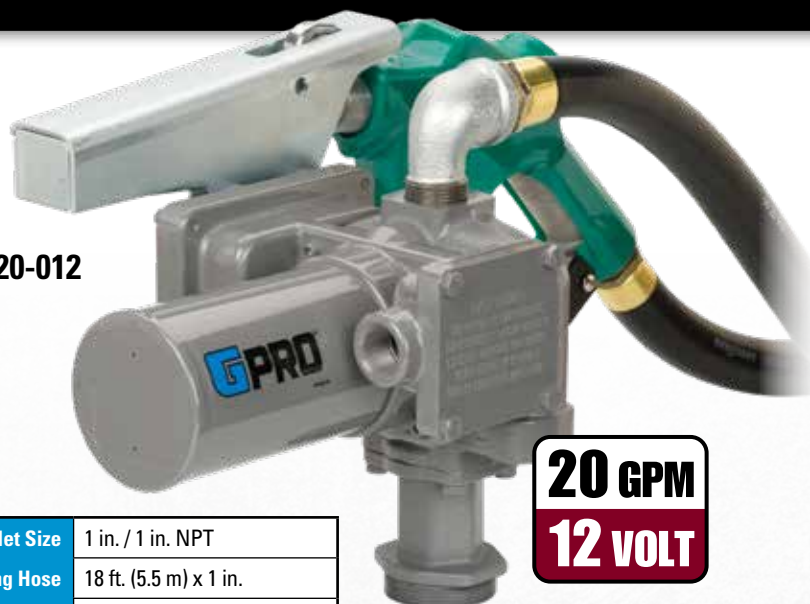


20 GPM
12 VOLT



PRO20-012 SPECIFICATIONS

Flow Rate	20 GPM (76 L/min)
Voltage	12V (dc)
Type	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.
Power Cord	18 ft. (5.5 m) x 10/2 AWG

Inlet / Outlet Size	1 in. / 1 in. NPT
Dispensing Hose	18 ft. (5.5 m) x 1 in.
Suction Pipe	Metal, 1 in. NPT, adjustable to 40 in. (101.6 cm)
Nozzle Holder	Lockable
Warranty	4 Year

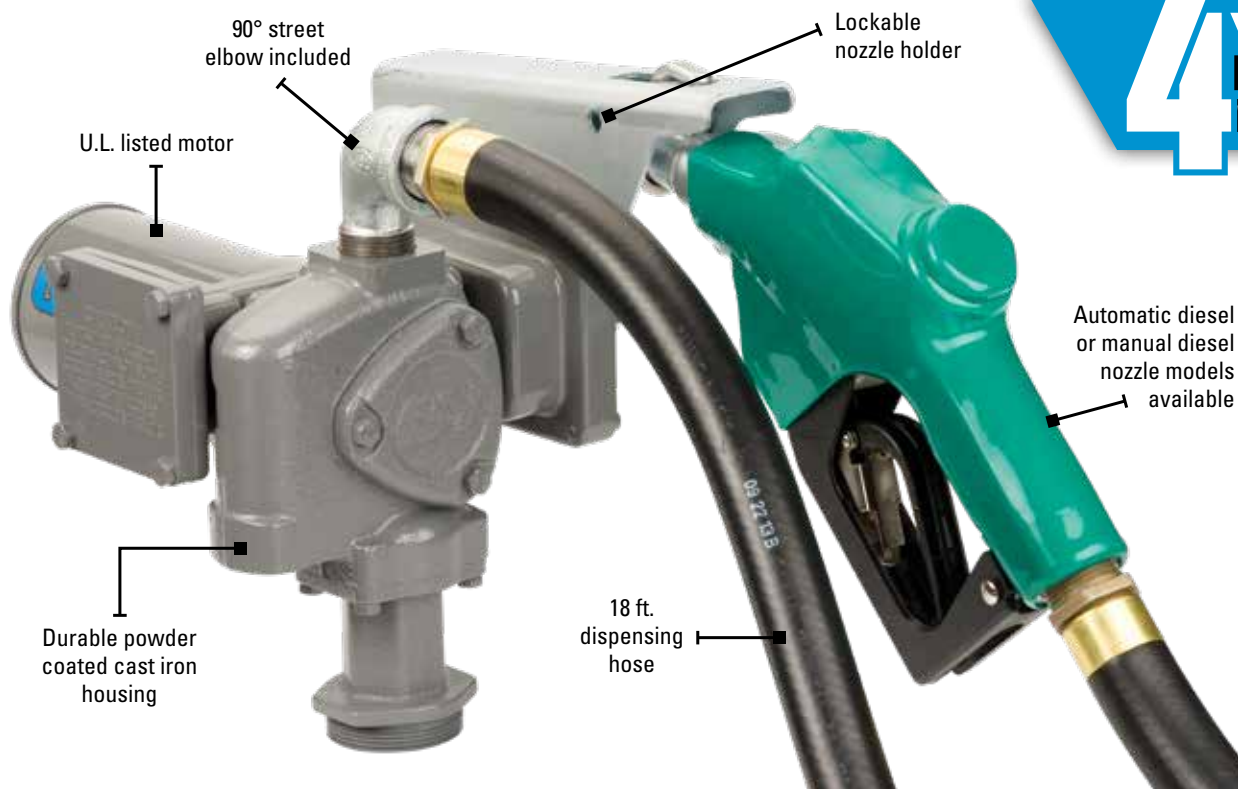

4 YEAR
PUMP
WARRANTY

ORDERING INFORMATION

Model	Part No.	Nozzle	Hose	Suction Pipe	Temperature Rating	Meter
PRO20-012AD	501000-03	Automatic Diesel	18 ft.	Metal	-20° F / -29° C	None
PRO20-012MD	501000-02	Manual Diesel	18 ft.	Metal	-20° F / -29° C	None
PRO20-012PO	501000-01	None	None	None	Tested to -40° F / -40° C	None

FOR USE WITH gasoline, diesel fuel and kerosene. Refer to Owner's Manual for full list of fuels.

PRO25-012

When reduced fueling time is critical, the high-flow PRO25 delivers with up to 25 GPM.

25 GPM
12 VOLT



4 YEAR
PUMP
WARRANTY



- Extended duty cycle tested to exceed industry standards
- Weight centering inlet base includes pressure relief and easy fuel strainer access
- Field replaceable switch and vanes
- 40 amp circuit breaker motor protection
- Extreme Temperature Series (XTS) model available
- Factory-installed power cord

PRO25-012 SPECIFICATIONS


Flow Rate	25 GPM (95 L/min)
Voltage	12V (dc)
Type	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.
Power Cord	18 ft. (5.5 m) x 10/2 AWG
Inlet / Outlet Size	1 in. / 1 in. NPT
Dispensing Hose	18 ft. (5.5 m) x 1 in.
Suction Pipe	Metal, 1 in. NPT, adjustable to 40 in. (101.6 cm)
Nozzle Holder	Lockable
Warranty	4 Year

ORDERING INFORMATION

Model	Part No.	Nozzle	Hose	Suction Pipe	Temperature Rating
PRO25-012AD	502000-03	Automatic Diesel	18 ft.	Metal	-20° F / -29° C
PRO25-012MD	502000-02	Manual Diesel	18 ft.	Metal	-20° F / -29° C
PRO25-012PO	502000-01	None	None	None	-20° F / -29° C

Extreme Temperature Series (XTS)

PRO25-012PO/XTS	502000-05	None	None	None	Tested to -40° F / -40° C
-----------------	-----------	------	------	------	---------------------------

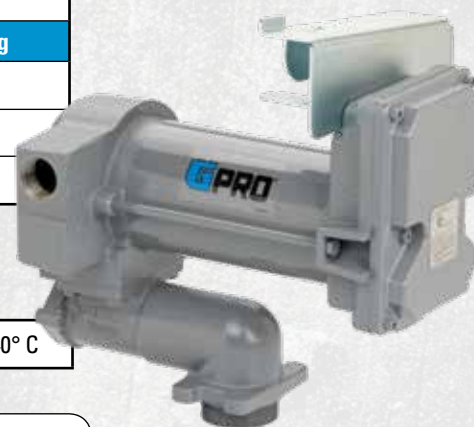

FOR USE WITH gasoline, diesel fuel and kerosene. Refer to Owner's Manual for full list of fuels.

PRO20-115

Impressive 20 GPM flowrate is ideal for fleet, agriculture or industrial applications with stationary storage tanks.



- Extended duty cycle tested to exceed industry standards
- Center based inlet includes pressure relief and easy fuel strainer access
- Field replaceable switch and vanes
- Tank adapter included
- Thermally protected motor
- Vacuum breaker ready, see Accessories for kit (page 10)
- Extreme Temperature Series (XTS) model available

PRO20-115 SPECIFICATIONS

Flow Rate	20 GPM (76 L/min)
Voltage	115V (ac)
Type	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.
Inlet / Outlet Size	1 in. / 1 in. NPT
Dispensing Hose	18 ft. (5.5 m) x 1 in.
Nozzle Holder	Lockable
Warranty	4 Year

ORDERING INFORMATION

Model	Part No.	Nozzle	Hose	Temperature Rating
PRO20-115AD	503000-03	Automatic Diesel	18 ft.	-20° F / -29° C
PRO20-115MD	503000-02	Manual Diesel	18 ft.	-20° F / -29° C
PRO20-115PO	503000-01	None	None	-20° F / -29° C

Extreme Temperature Series (XTS)

PRO20-115PO/XTS	503000-05	None	None	Tested to -40° F / -40° C
-----------------	-----------	------	------	---------------------------



Engineered for high performance and longevity,
the PRO35 gets the job done fast and efficiently.


PRO35-115

- Extended duty cycle tested to exceed industry standards
- Center based inlet includes pressure relief and easy fuel strainer access
- Field replaceable switch and vanes
- Tank adapter included
- Thermally protected motor
- Vacuum breaker ready, see Accessories for kit (page 10)
- Extreme Temperature Series (XTS) model available

PRO35-115 SPECIFICATIONS

Flow Rate	35 GPM (132 L/min)
Voltage	115V or 230V (ac)
Type	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.
Inlet / Outlet Size	1 1/4 in. / 1 in. NPT
Dispensing Hose	18 ft. (5.5 m) x 1 in.
Nozzle Holder	Lockable
Warranty	4 Year

35 GPM
115/230
VOLT

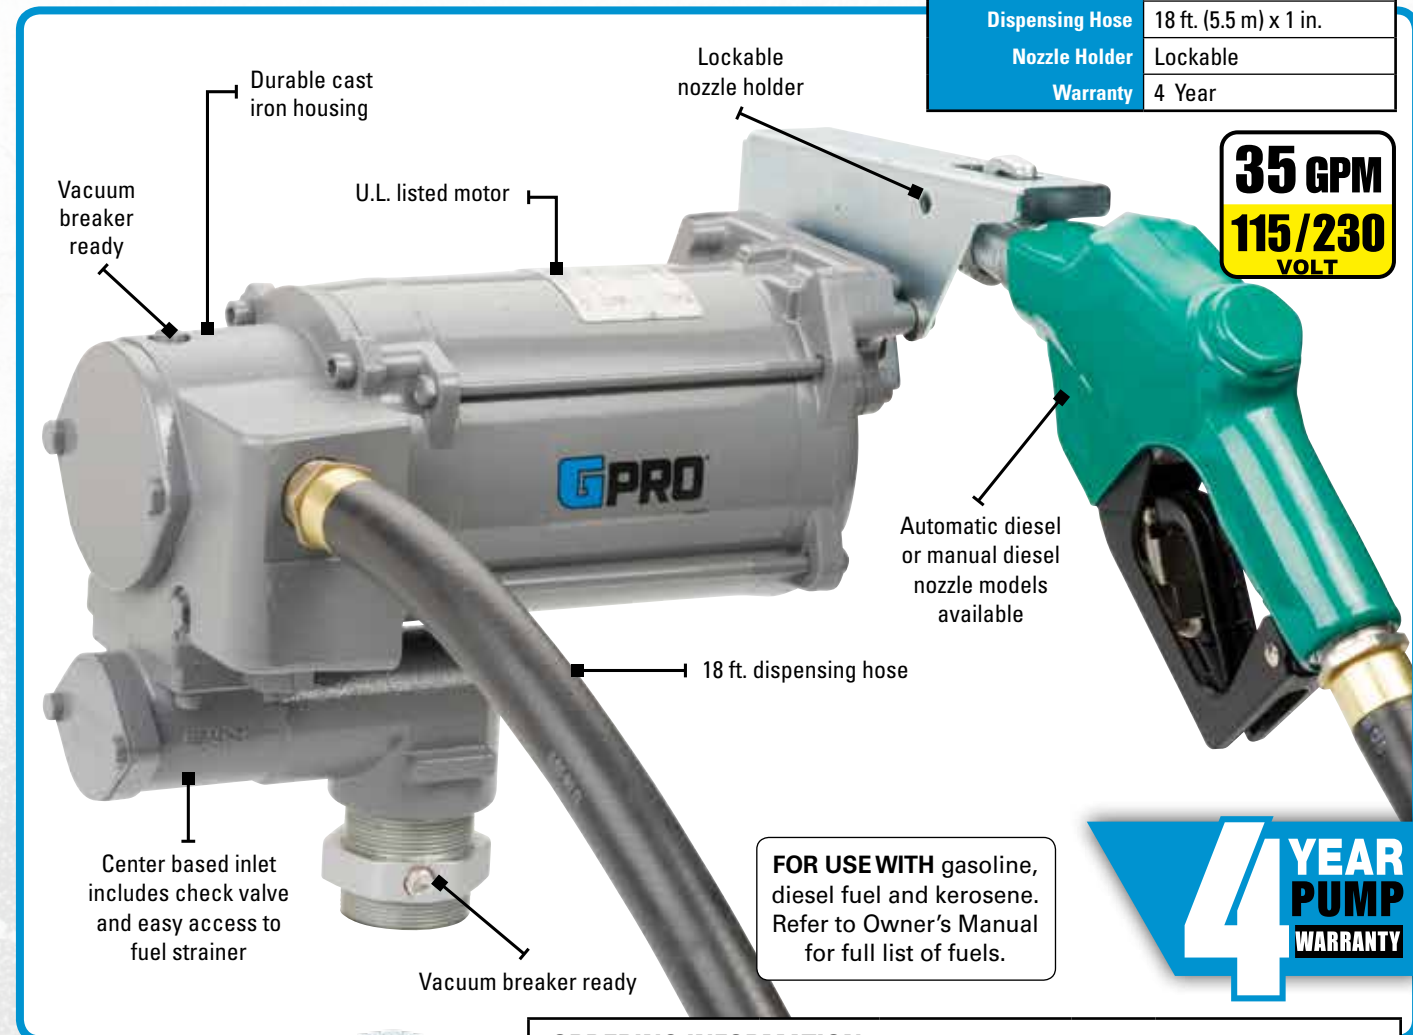


FOR USE WITH gasoline, diesel fuel and kerosene. Refer to Owner's Manual for full list of fuels.

4 YEAR
PUMP
WARRANTY

ORDERING INFORMATION

Model	Part No.	Nozzle	Hose	Temperature Rating
PRO35-115AD	504000-03	Automatic Diesel	18 ft.	-20° F / -29° C
PRO35-115MD	504000-02	Manual Diesel	18 ft.	-20° F / -29° C
PRO35-115PO	504000-01	None	None	-20° F / -29° C

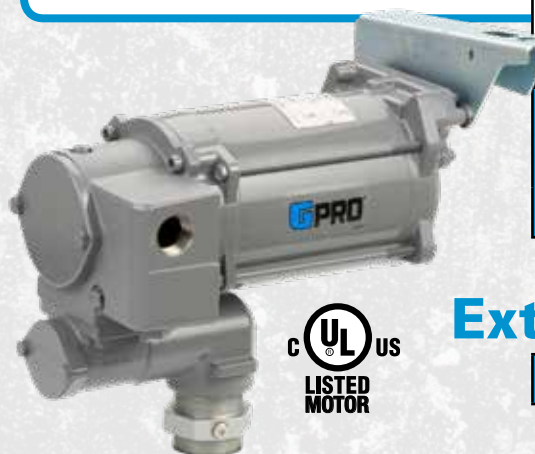


Extreme Temperature Series (XTS)

PRO35-115PO/XTS	504000-05	None	None	Tested to -40° F / -40° C
-----------------	-----------	------	------	---------------------------

Pump & Meter COMBOS

**4 YEAR
PUMP &
METER
WARRANTY**

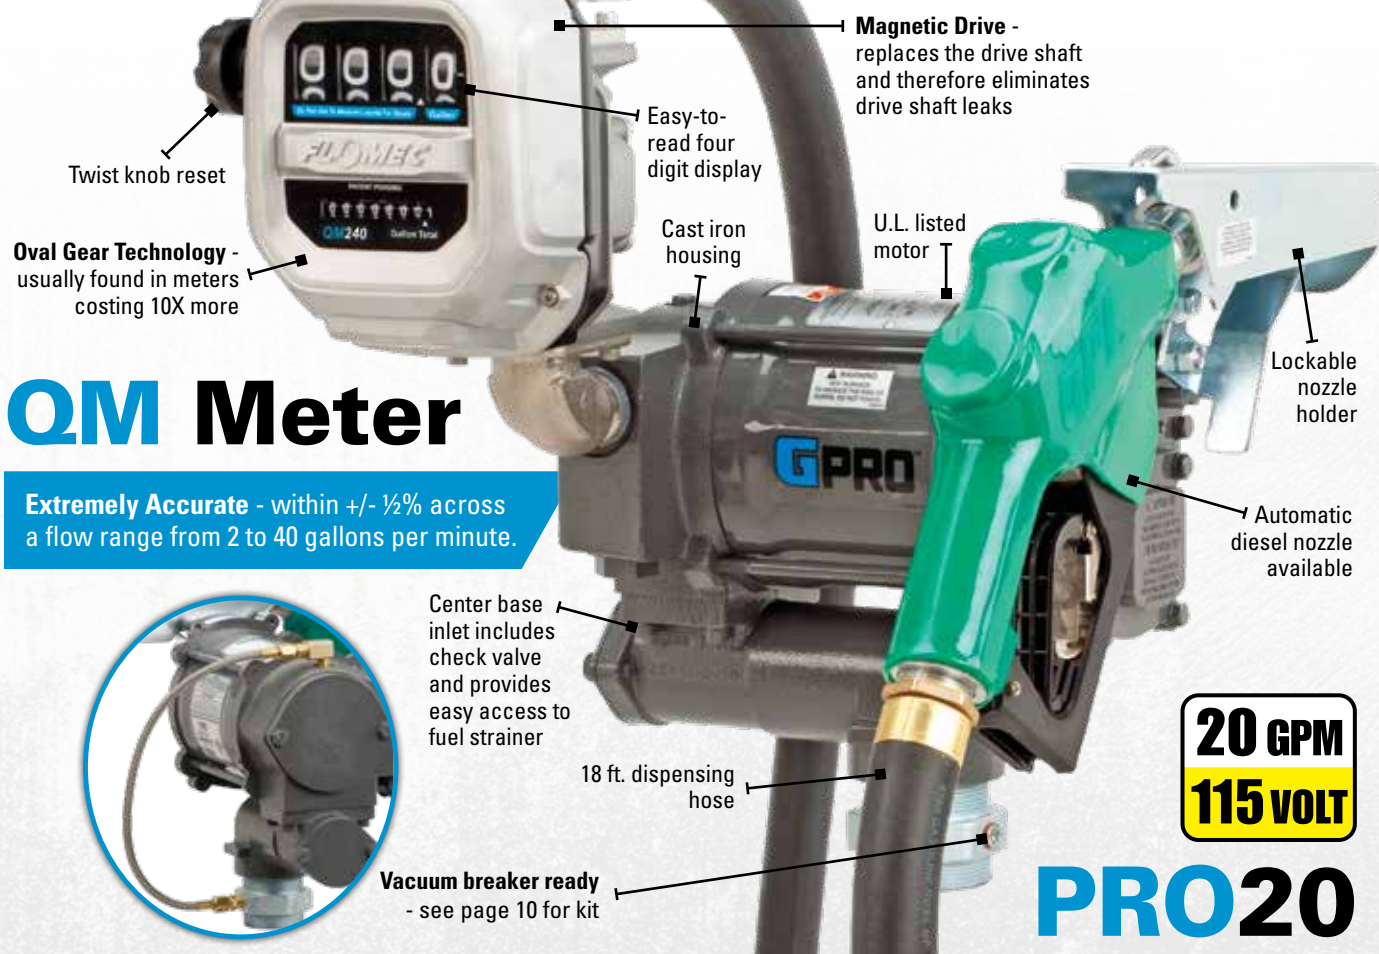

QM Meter

Extremely Accurate - within $\pm 1/2\%$ across a flow range from 2 to 40 gallons per minute.



Center base inlet includes check valve and provides easy access to fuel strainer

Vacuum breaker ready - see page 10 for kit

COMBOS SPECIFICATIONS	PRO20-115/QM240/QM150	PRO35-115/QM240/QM150
Flow Rate	20 GPM (75 L/min)	35 GPM (132 L/min)
Voltage	115V (ac)	115V or 230V (ac)
Type	Carbon Vane	
Duty Cycle (On / Off)	30 min. / 30 min.	
Inlet / Outlet Size	1 in. / 1 in.	1 1/4 in. / 1 in.
Dispensing Hose	18 ft. (5.5 m) x 1 in.	
Warranty	4 Year Pump / 4 Year Meter (See Owner's Manual for Details)	

Designed for stationary tank applications where high flow and long life are desired.

- Factory-assembled, **GPRO COMBOS** are available with the **PRO20 or PRO35 PUMP** and include the **QM FUEL METER**
- Thermally protected motor
- Center based inlet includes check valve and easy strainer access
- Field-replaceable switch and vanes
- Tank adapter included

PRO20-115 COMBO ORDERING INFORMATION

Model	Part No.	Nozzle	Meter Units	Hose
PRO20-115AD/QM240G8N	503000-71	Auto Diesel	Gallon	18 ft.
PRO20-115AD/QM150L8N	503000-73	Auto Diesel	Litre	18 ft.
PRO20-115PO/QM240G8N	503000-70	None	Gallon	None
PRO20-115PO/QM150L8N	503000-72	None	Litre	None

PRO35-115 COMBO ORDERING INFORMATION

Model	Part No.	Nozzle	Meter Units	Hose
PRO35-115AD/QM240G8N	504000-71	Auto Diesel	Gallon	18 ft.
PRO35-115AD/QM150L8N	504000-73	Auto Diesel	Litre	18 ft.
PRO35-115PO/QM240G8N	504000-70	None	Gallon	None
PRO35-115PO/QM150L8N	504000-72	None	Litre	None

FOR USE WITH gasoline, diesel fuel and kerosene.
Refer to Owner's Manual for full list of fuels.

800-835-0113 | • FAX: 316-686-6746 • **GoGPRO.com**

EXTREME ACCURACY*

QM240/QM150 FUEL METER

Combine the accuracy of the QM Series with high performance of our GPRO Pumps!

- **20X** more precise at 20GPM AND **4X** higher accuracy: **1/2%** over entire flow range*
- **MAG Drive** Frictionless Magnetic Drive Technology (**NO SEAL = NO LEAKS**)
- **40 vs 30 GPM:** 30% higher flow capacity*
- **ACCURATE LOW END - 3X BETTER:** Accurate to **2 GPM** vs **6 GPM**
- Versatile **rotatable display mount**
- **LOWER PRESSURE DROP - 4 psi vs 12 psi** pressure drop at **35 GPM** (and only 1 psi at 10 GPM)
- **Positive displacement oval gear** technology: no calibration required



QM240 / QM150 METER SPECIFICATIONS

Unit of Measure	U.S. Gallons or Litres
Flow Rate	2 to 40 GPM (15.14 to 151.42 L/min)
Housing Material	Aluminum
Maximum Working Pressure	50 psi (3.4 bar)
Inlet / Outlet Size	1-inch NPT

METER ORDERING INFORMATION

Model	Part No.	Units	Thread	Warranty	Certifications
QM240N10	139121-06	Gallons	1 in. NPT	4 Year	UL LISTED
QM150N10	139121-07	Litres	1 in. NPT	4 Year	

*When compared to a Conventional Mechanical Meter

QM240-RD/QM150-RD REMOTE DISPENSER

Provides ground-level access to meter and nozzle when used on in-ground or above ground tanks. Assemble your system by following these steps:

- 1** Choose to measure gallons or litres.


Model	Part No.	Flow Range
QM240-RD	143650-11	2 to 40 GPM
QM150-RD	143650-12	15.14 to 151.42 L/min



Includes: QM fuel meter, solenoid valve and lockable nozzle holder (purchase pump, nozzle and hose separately).

- 2** Choose the pump that best meets your needs.

	Model	Part No.	Flowrate
a	PRO20-115RD	503000-04	20 GPM (76 L/min)
b	PRO35-115RD	504000-04	35 GPM (132 L/min)

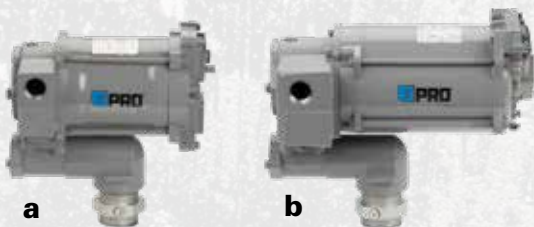

- 4** Finish the installation with the proper accessories:

Part No.	Descriptions
a 143500-16	Mounting Shelf Kit
b 133511-02	Cabinet Base



See Accessories (page 10) for nozzles and hoses.

- 3** Add the Vacuum Breaker Kit (see page 10).

Part No. 504500-03

FOR USE WITH gasoline, diesel fuel and kerosene. Refer to Owner's Manual for full list of fuels.

Part No.	Description
NOZZLES	
906008-750	Automatic Nozzle Diesel, 1 in. NPT, UL
906001-10	Manual Nozzle, Leaded, 1 in. NPT, UL
HOSES	
150100-01	Fuel Hose, UL, 1 in. NPT, 1 in. x 18 ft. (5.5 m) w/Static Wire
110188-02	Fuel Hose, 1 in. NPT, 1 in. x 18 ft. (5.5 m) w/Static Wire











Part No.	150400-04
----------	-----------






Part No.	906001-4
----------	----------

FILTERS & ADAPTER
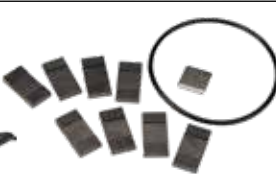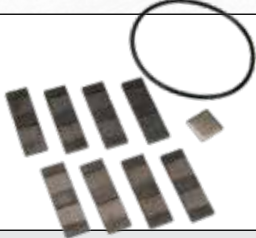
<div>FILTERS & ADAPTER</div>					
	1 in. NPT Aluminum Adapter for 30 & 40 GPM (113 & 151 L/min), 1-1/2 - 16 UNF	Particulate Filter: 30 GPM (113 L/min), 10 micron, 1-1/2 - 16 UNF	Particulate Filter: 40 GPM (151 L/min) 30 micron, 1 1/2 - 16 UNF	Water & Particulate Filter: 30 GPM (113 L/min) 10 micron, 1 1/2 - 16 UNF	Water & Particulate Bio-Tek® Filter: 40 GPM (151 L/min), 2 micron, 1-1/2 - 16 UNF
	Part No.	906005-67	129320-01	129340-06	129320-02

			
Battery Clamps, Heavy Duty	Vane Kit: Shaft key, eight 1.25 in. vanes and one seal	Vane Kit: Shaft key, eight 2 in. vanes and one seal	
Model/Part#	133263-01	133501-1	133502-1
PRO20-012	X		
PRO25-012	X	X	
PRO20-115		X	
PRO35-115			X

		
Vacuum Breaker Kit	Shaft Seal Kit: Retaining ring, shaft seal and spacer washer	Cold Weather Shaft Seal Kit Tested to -40° F.
504500-03	133503-1	133503-05
	X	X
X	X	X
X	X	X

SUCTION PIPES

SUCTION PIPES			
			
Steel suction pipe, 1 in. NPT, adjusts from 22 in. to 40 in. (55.9 to 101.6 cm)		Plastic suction pipe, 1 in. NPT, adjusts from 15 in. to 40 in. (38.1 to 101.6 cm)	
			
		Plastic suction pipe extension, adds 14.5 in. (36.8 cm)	
Part No.	110243-01	110241-01	110241-02



HAND PUMPS

FOR THE SMALL JOBS



HP-100

Lever action piston pump with lockable handle



- Dual-flo® handle provides high volume and low volume settings
- Pumps fluid on both the push and pull strokes for fast delivery
- Built-in anti-siphon valve

HP-100 SPECIFICATIONS

Flow Rate	Up to 50 gallons (189 litres) per 100 strokes
Type	Piston
Nozzle	Metal Spout
Inlet / Outlet Size	1 in. / 3/4 in. NPT
Tank Fitting	2 in. NPT
Dispensing Hose	8 ft. (2.5 m) x 3/4 in.
Suction Pipe	Telescoping 15 to 40 in.
Warranty	2 Year Pump

ORDERING INFORMATION

Model	Part No.
HP-100-UL	114000-10

DP-20

Lever action diaphragm pump with lockable handle



- Can be used for dirty or contaminated fluids

DP-20 SPECIFICATIONS

Flow Rate	20 gallons (76 litres) per 100 strokes
Type	Diaphragm
Nozzle	Thermoplastic
Inlet / Outlet Size	1 in. / 3/4 in. NPT
Tank Fitting	2 in. NPT
Dispensing Hose	8 ft. (2.5 m) x 3/4 in.
Suction Pipe	Telescoping 15 to 40 in.
Warranty	2 Year Pump

ORDERING INFORMATION

Model	Part No.
DP-20-UL	138000-02

RP-10

Rotary action pump with lockable handle



- Built-in anti-siphon valve

RP-10 SPECIFICATIONS

Flow Rate	10 gallons (38 litres) per 100 revolutions
Type	Rotary
Nozzle	Metal Spout
Inlet / Outlet Size	1 in. / 3/4 in. NPT
Tank Fitting	2 in. NPT
Dispensing Hose	8 ft. (2.5 m) x 3/4 in. with Static Wire
Suction Pipe	Telescoping 15 to 40 in.
Warranty	2 Year Pump

ORDERING INFORMATION

Model	Part No.
RP-10-UL	123000-06

FOR USE WITH gasoline, diesel fuel and kerosene, medium oil (up to 30W) and hydraulic fluid. Refer to Owner's Manual for details.



ENGINEERED TO DELIVER

Visit **GoGPRO.com**

GPI / **FLOMEC**® / **GPRO**®

GREAT PLAINS INDUSTRIES



- WICHITA -
Headquarters
Great Plains Industries, Inc.
5252 E. 36th St. N.
Wichita, KS 67220-3205
316-686-7361
GPI.net

- SYDNEY -
Manufacturing & Sales
Great Plains Industries Australia
1/16 Atkinson Road
Taren Point, NSW, 2229, Australia
+61 2 9540 4433
FLOMEC.net

- MEXICO -
Sales Office
Great Plains Industries S De RL DE CV
Av. Fray Luis de Leon 8051
Oficina 13 Centro Sur
Queretaro, Qro., Mexico 76090
+52 (442) 229-3139

